

FLIR A38/A68


Thermal Cameras for
Machine Vision



FLIR A38/A68 thermal cameras are Teledyne FLIR's smallest uncooled long-wave infrared cameras for industrial automation and machine vision applications. Designed for use in process control and quality assurance, these thermal imaging temperature sensors provide visual temperature information to support key decision-making in applications where detecting small temperature variations is critical.

Standard vision camera protocols allow the cameras to integrate seamlessly into GenICam™ compliant software resulting in accelerated system development and solution deployment. The compact size and uncomplicated camera design deliver reliable and robust thermal imaging data. While straightforward connections with Power over Ethernet (PoE) and expanded operating temperature range make them ideal thermal cameras for easy installations in industrial environments.

www.flir.com/A38_A68

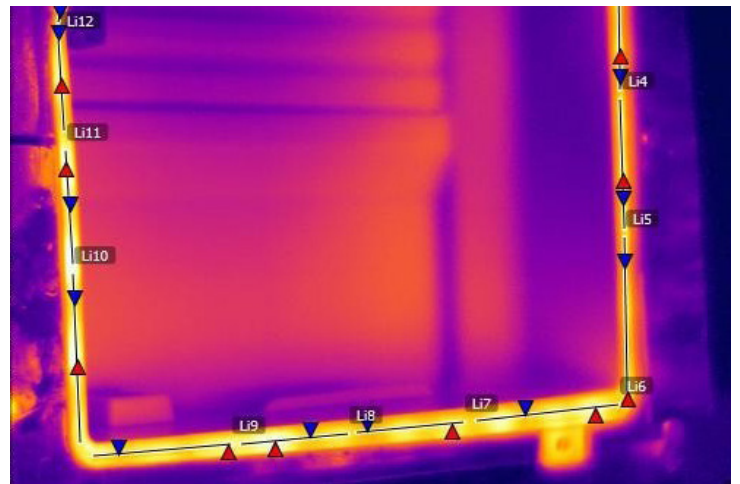

SIMPLIFIED SETUP FOR COMPLEX APPLICATIONS

Uncomplicated design results in reliable and robust thermal imaging data

- GigE Vision provides a simple image streaming interface
- GenICam compliance makes it easy to integrate camera into user-built software
- Compatible with 3rd party SDKs allows user to work in their preferred environment

EASY INTEGRATION INTO EXISTING SYSTEMS

Standard vision camera protocols accelerate development and solution deployment

- 60 Hz imaging frequency provides the high frame rates needed for numerous in-process applications
- 8- and 16-bit video streams meet the needs of most machine vision integrators
- Power over Ethernet (PoE) reduces cabling and installation complexity

SWaP-C OPTIMIZED

FLIR A38/A68 cameras are small, rugged, and affordable

- Compact 29 × 36 × 59 mm form factor allows the camera to fit into tight spaces and small enclosures
- Expanded operating temperature range ensures the cameras can function in a wider range of environments

SPECIFICATIONS

Model	A38 (24° or 42° lens)	A68 (24° or 42° lens)	Environmental	
Infrared resolution	320 × 240 pixels	640 × 480 pixels	Operating temperature range	-35°C to 60°C (-31°F to 140°F)
Thermal sensitivity (NETD)	<50 mK @ 25°C ambient	<50 mK @ 25°C ambient	Storage temperature range	-40°C to 80°C (-40°F to 176°F)*
Field of view (FOV)	24° × 18.1° or 40.1° × 29°	24.2° × 18.4° or 42.1° × 31.9°	Humidity (operating and storage)	Maximum 80% relative humidity, non-condensating
Minimum focus distance	0.4 m (1.3 ft) or 1.5 m (4.9 ft)	2.0 m (6.6 ft) or 1.3 m (4.3 ft)	General	
Focal length	13 mm (0.51 in) or 8.1 mm (0.32 in)	25 mm (0.98 in) or 14.2 mm (0.56 in)	Weight (without lens)	67 g (2.4 oz)
f-number	1.0 or 1.1	1.2 or 1.24	Size (without lens, L/W/H)	59 × 29 × 36 mm (2.32 × 1.14 × 1.42 in)
Image frequency	60 Hz	30 Hz	Tripod mounting	UNC ¼"-20
Focus	Fixed	Fixed	Color	Black
Spectral range	8–14 µm (LWIR)	8–14 µm (LWIR)		
Detector pitch	17 µm	17 µm		
Ethernet				
Interface	Wired	Wired		
Connector type	RJ-45	RJ-45		
Ethernet, purpose	Control, image, and power	Control, image, and power		
Ethernet, type	Gigabit Ethernet	Gigabit Ethernet		
Ethernet, communication	GigE Vision / GenlCam	GigE Vision / GenlCam		
Ethernet, power	Power over Ethernet (PoE)	Power over Ethernet (PoE)		
Ethernet, standard	IEEE 802.3	IEEE 802.3		
Ethernet, protocols	GigEVision	GigEVision		
Pixel format	Mono8 or 16-bit/pixel	Mono8 or 16-bit/pixel		
Power				
Power consumption, typical	12 V: 2.8 W 24 V: 2.8 W PoE (48 V): 3.5 W	12 V: 2.8 W 24 V: 2.8 W PoE (48 V): 3.5 W		
Power consumption, maximum	12 V: 4.4 W 24 V: 4.4 W PoE (48 V): 4.8 W	12 V: 4.4 W 24 V: 4.4 W PoE (48 V): 4.8 W		

*To avoid possible damage during storage, ensure that the sensor is not exposed to air. Use a lens cap or lens to cover the sensor.

Specifications are subject to change without notice.
For the most up-to-date specs, go to www.teledyneflir.com

For more information contact: Sales@TeledyneFLIR.com
or to find your local support number, visit: flir.com/contactsupport

This product is subject to United States export regulations and may require US authorization prior to export, reexport, or transfer to non-US persons or parties. Diversion contrary to US law is prohibited.

For assistance with confirming the Jurisdiction & Classification of Teledyne FLIR, LLC products, please contact exportquestions@flir.com.

©2022 Teledyne FLIR, LLC. All rights reserved.

Revised 12/12/22
A38_A68_Datasheet-LTR 122022

